

FTPC30V-L series

30W LED Power Supply (CV)



■ Features:

- Constant voltage design
- European AC input range
- Protections: Overload / Over voltage / Short circuit / Over temperature
- Cooling by free air convection
- Compliance to worldwide regulations for lighting



ELECTRICAL SPECIFICATION

MODEL	FTPC30V12-L		FTPC30V24-L			
OUTPUT						
RATED VOLTAGE	12V		24V			
RATED CURRENT	2.5A		1.25A			
CURRENT RANGE	0 ÷ 2.5A		0 ÷ 1.25A			
RATED POWER	30W		30W			
NO LOAD OUTPUT VOLTAGE (MAX.)	12.6V		25.2V			
LINE REGULATION	± 1%		± 1%			
LOAD REGULATION	± 1%		± 1%			
VOLTAGE TOLERANCE [3]	± 5%		± 5%			
RIPPLE & NOISE (MAX.) [2]	360mV _{p-p}		720mV _{p-p}			
SETUP TIME [4]	500ms / 230VAC at full load					
INPUT						
VOLTAGE RANGE	200 ÷ 240VAC					
FREQUENCY RANGE	50 / 60Hz					
POWER FACTOR (MIN.)	PF ≥ 0.9 / 230VAC at full load					
THD (MAX)	10%					
EFFICIENCY (MAX.)	85%		86%			
AC CURRENT (TYP.)	< 0.17A / 230VAC					
INRUSH CURRENT (TYP.)	15A / 230VAC; T _{WIDTH} = 550µs					
MAX. NO. OF PSU ON CIRCUIT BREAKER	B10	B16	C10	C16	D10	D16
	25	40	37	60	50	80
NO LOAD POWER CONSUMPTION (MAX.)	< 0.2W					

FTPC30V-L series

30W LED Power Supply (CV)



PROTECTIONS

OVER CURRENT	Range: 130% rated output power Type: hiccup mode. Recovers automatically after fault condition is removed.
SHORT CIRCUIT	Type: hiccup mode. Recovers automatically after fault condition is removed.
OVER VOLTAGE	Range: 150% rated output voltage.
OVER TEMPERATURE	Range: IC detection (115°) Type: shut down output voltage. Re-power on to recovery

WORKING ENVIRONMENT

WORKING TEMPERATURE	-20°C ÷ +45°C
WORKING HUMIDITY	10 ÷ 90% RH

SAFETY AND EMC REGULATIONS

SAFETY STANDARDS	Compliance to EN61347-1, EN61347-2-13
EMC EMISSION	Compliance to EN55015
EMC IMMUNITY	Compliance to EN61547
HARMONIC CURRENT	Compliance to EN61000-3-2 Class C
OTHER REGULATIONS	Compliance to Commission Regulation (EU) 2019/2020

OTHERS

DIMENSIONS	123 x 44.6 x 19.2mm (L x W x H)
LIFETIME	50 000 hours / 230VAC, full load, tc < 80°C
MTBF	200 000 hours / 230VAC, full load, ta=45°C
WEIGHT AND PACKING	0.09kg ; 100pcs./carton; carton dimensions: 25 x 23.5 x 21.5 cm

EAN CODE





1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF i 47µF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.

FTPC30V-L series

30W LED Power Supply (CV)



MECHANICAL SPECIFICATION

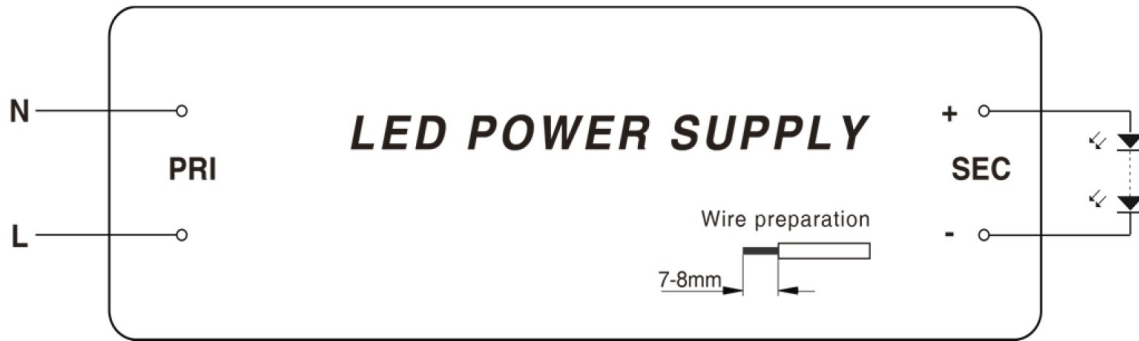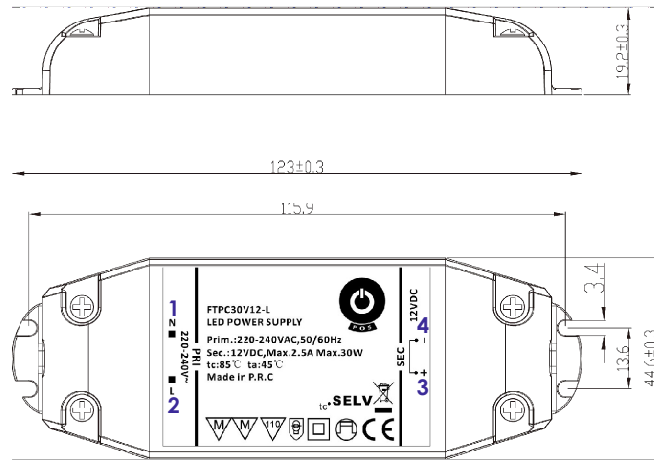

PIN ASSIGNMENT

No.	Assignment	No.	Assignment
1	Input: AC/N	3	Output: U _{OUT} +
2	Input: AC/L	4	Output: U _{OUT} -